



Exposure analysis to multiple plane waves

¹Thierry Kientega, ¹E. Conil, ¹A. Hadjem, ¹A. Gati, ²E. Richalot , ¹M.F Wong,²Odile Picon, ¹Joe Wiart

¹Orange Labs, ²ESYCOM



UNIVERSITÉ —
PARIS-EST
recherche & développement






- General context
- Problematic
- Multiple plane waves exposure assessment
- Results and discussion
- Conclusion



General context

- With enhancement of wireless telecommunication (WIFI, cells phones etc..) exposure to electromagnetic waves has became a public debate

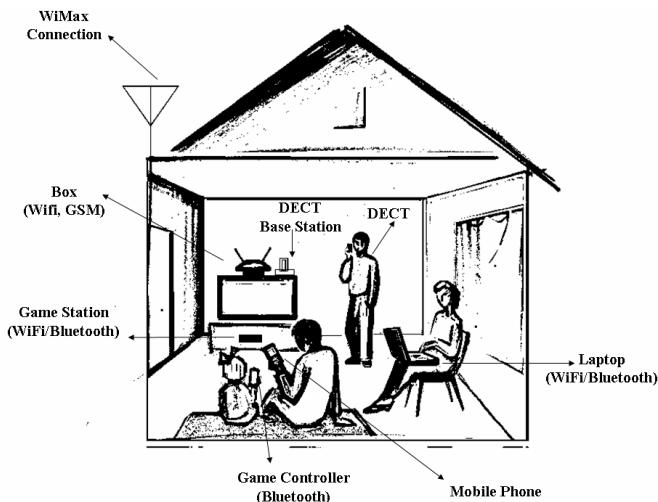


- Exposure assessment is a key question in many countries especially in France**
- Most of the investigations have been performed to single plane wave exposure but there was a lack of information on multiwaves exposure**




Plane wave exposure assessment

Conil[2007 and 2008] Studied influence of arrival angle(θ, ϕ) in the case of single plane wave exposure

$$SAR = \frac{\sigma E^2}{2\rho}$$

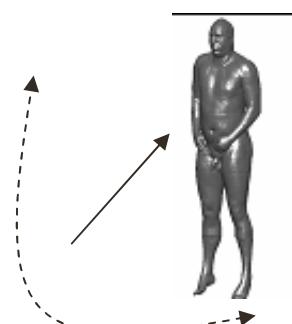


50%

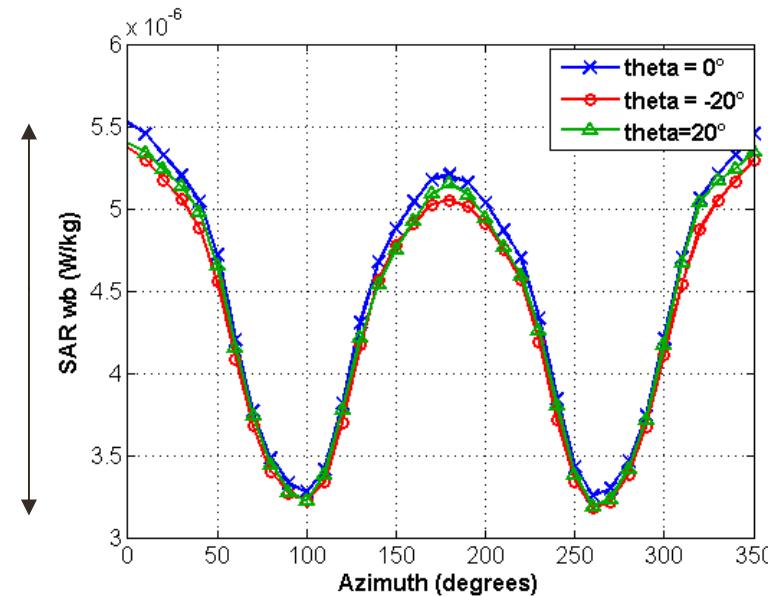




Influence of morphology

Conil studied influence of the morphology on the Specific absorption rate
in the case of **single plane wave exposure**

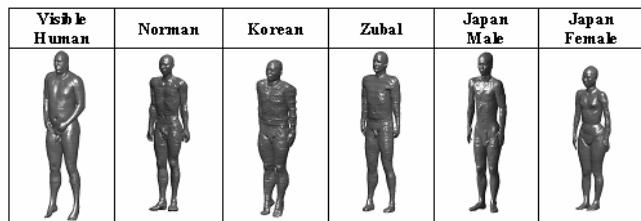



six different phantoms

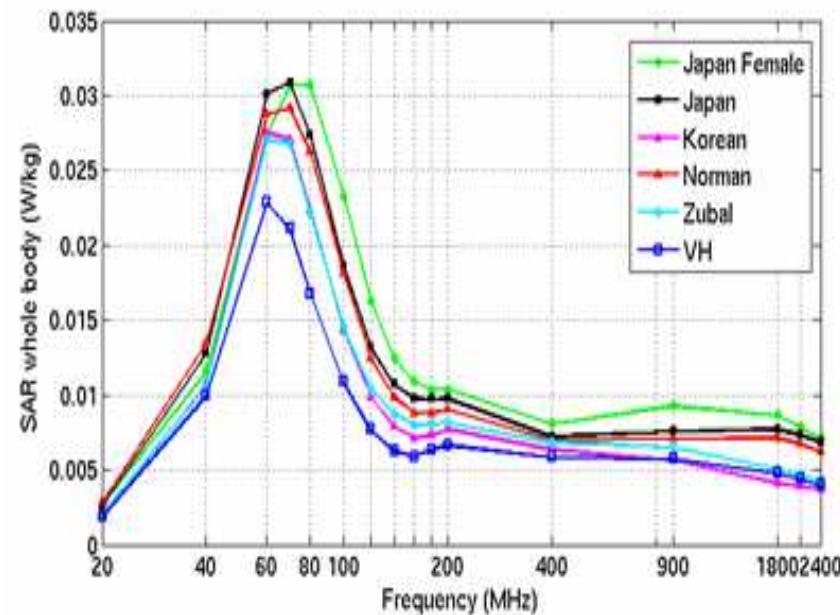




Multi-plane waves problematic

- In reality, the fields are coming from all direction due to reflections and diffractions. This field is affected by fast fading. The fast fading is induced by the recombination in phase of waves coming from everywhere with random phase
- How assess exposure of a person who moves in a realistic environment

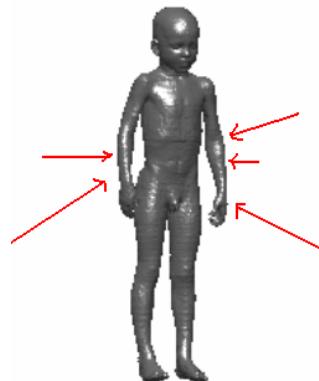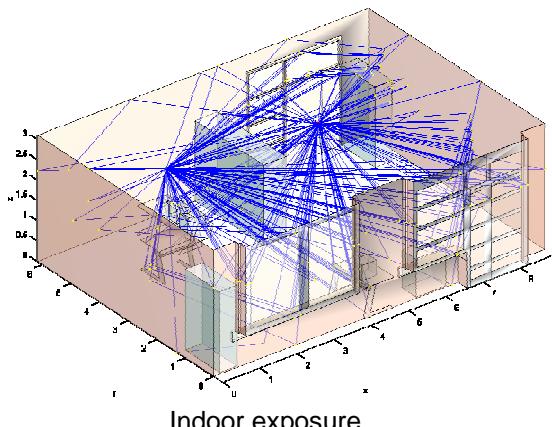

Phantom exposure to multiple plane waves

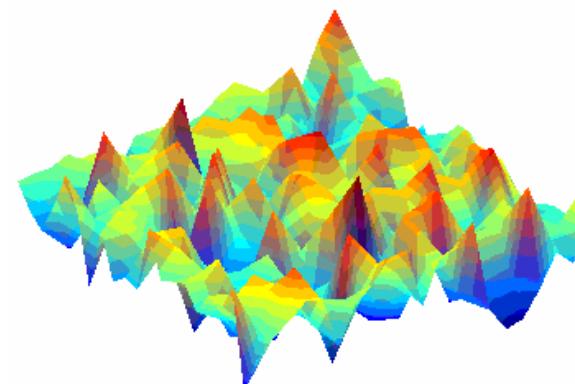

Fading phenomenon



Parameters influencing multi-plane waves exposure

The incident electric field can be modelled by a sum of plane waves coming from different directions with different phases and amplitudes


$$E_{inc}(r) = \sum_{n=1}^{N_{inc}} E_{inc,n} \exp(i \alpha_{inc,n} - i k_{inc,n} \cdot r) u_{E_{inc,n}}$$

Number of rays

Electric field strength

phase

Wave vector

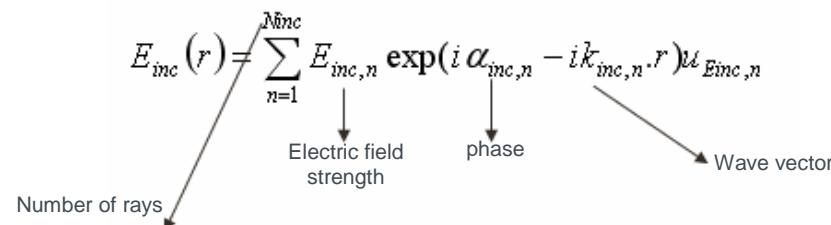

□ The field parameters must be defined:


- The waves are coming coherent (spatially and temporally) or not
- The numbers of rays (N_{inc})
- The amplitude of rays ($E_{inc,n}$)
- The arrival angles azimuth and elevation (ϕ and θ)
- The phase of waves (α)

For this study all the rays have vertical polarization
and elevation angle of 90°



Compare a plane wave exposure with multi plane waves

In a realistic environment with **multi plane waves**, we confront to variable electromagnetic field due to fast fading

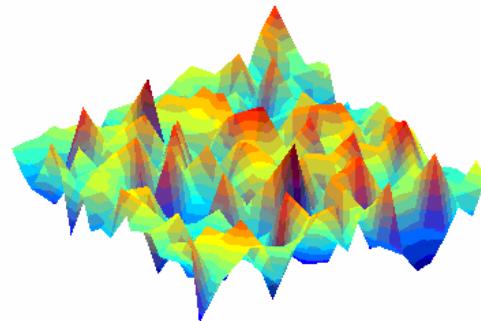

To ensure to compare exposure of single
plane wave to multiple plane waves we
normalize the whole body SAR

$$\text{Normalized - SAR} = \frac{\text{SAR}}{(\text{rms - } E)^2}$$



Normalization

If we consider all the space where the field is spread, by a analytic calculation we have the solution

$$E_{inc}(r) = \sum_{n=1}^{N_{inc}} E_{inc,n} \exp(i\alpha_{inc,n} - ik_{inc,n} \cdot r) u_{E_{inc,n}}$$

For 2 waves: $I = \langle E E^* \rangle = (E_1 + E_2)(E_1 + E_2)^* = E_1^2 + E_2^2 + 2 \operatorname{Re} \langle E_1 E_2^* \rangle$

limit is zero


For n waves: $E_{rms} = \sqrt{\sum_{i=1}^n E_{inc,i}^2}$

E (root mean square) for two numerical method:

- Consider many points having a distance of $\lambda/2$ in the box assumed not correlate and then have a statistical approach


- To calculate a Riemann integral

(For those two methods we obtained the same numerical results)

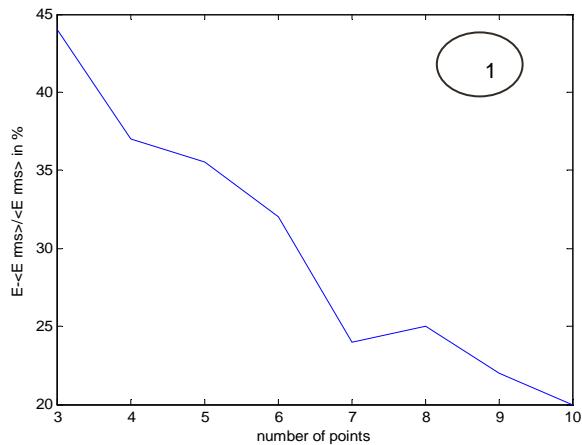

We must take more than 20 points to estimate a good value of E_{rms} . For 10 points we have 20% of error on the estimation of E_{rms}


Influence of the box size in the E_{rms} calculation

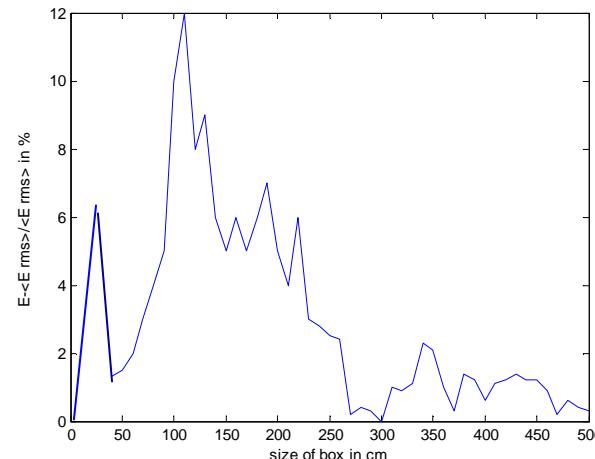




FDTD (Finite Difference in Time Domain) method:

The FDTD is a numerical method to resolve the maxwell equations by the method of finite difference time domain.

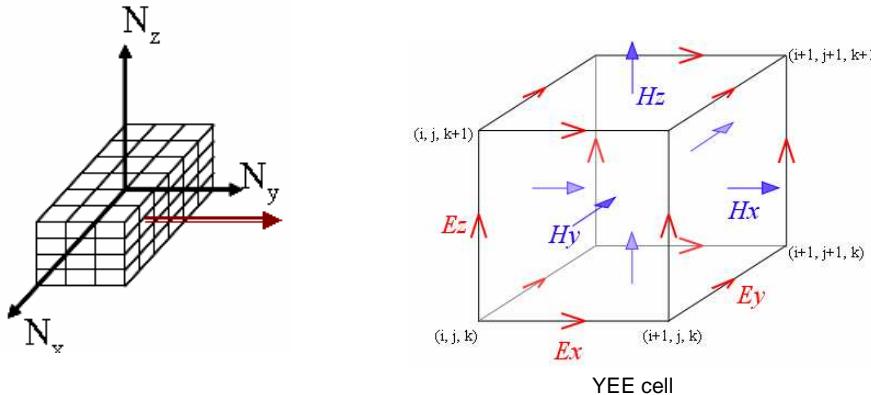

Huygens Box principle:

Maxwell equations say that it is possible to reconstruct the field inside a close volume. In the presence of object we have inside the Huygens Box the total field (E_t+E_s) and outter the Huygens Box the scattered field(E_d); incident E field is null.

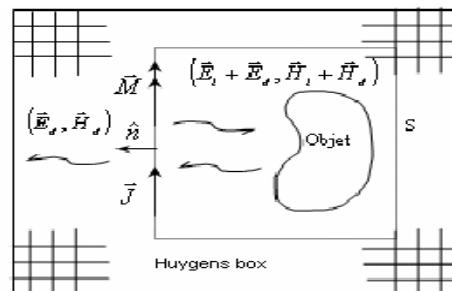





Analysis exposure to multi plane waves

We consider an exposure to 5 rays


Amplitude of rays has a normal distribution

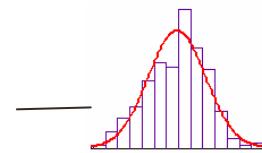

azimuthal angle(ϕ) and phase(α) have a uniform distribution between [0,2pi]



For this study all the rays have vertical polarization and elevation angle of 90°

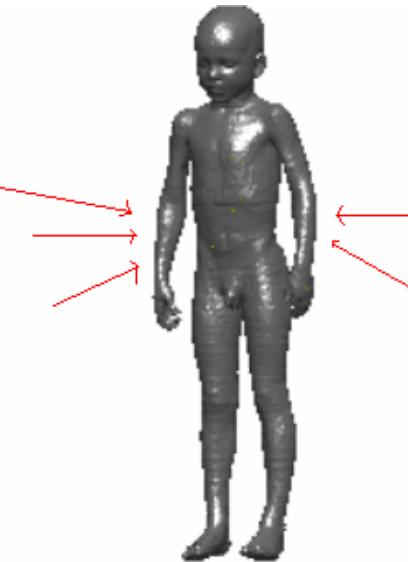

Theloniousss


Weight=19kg

Size=1.19m

6 years



Discussions

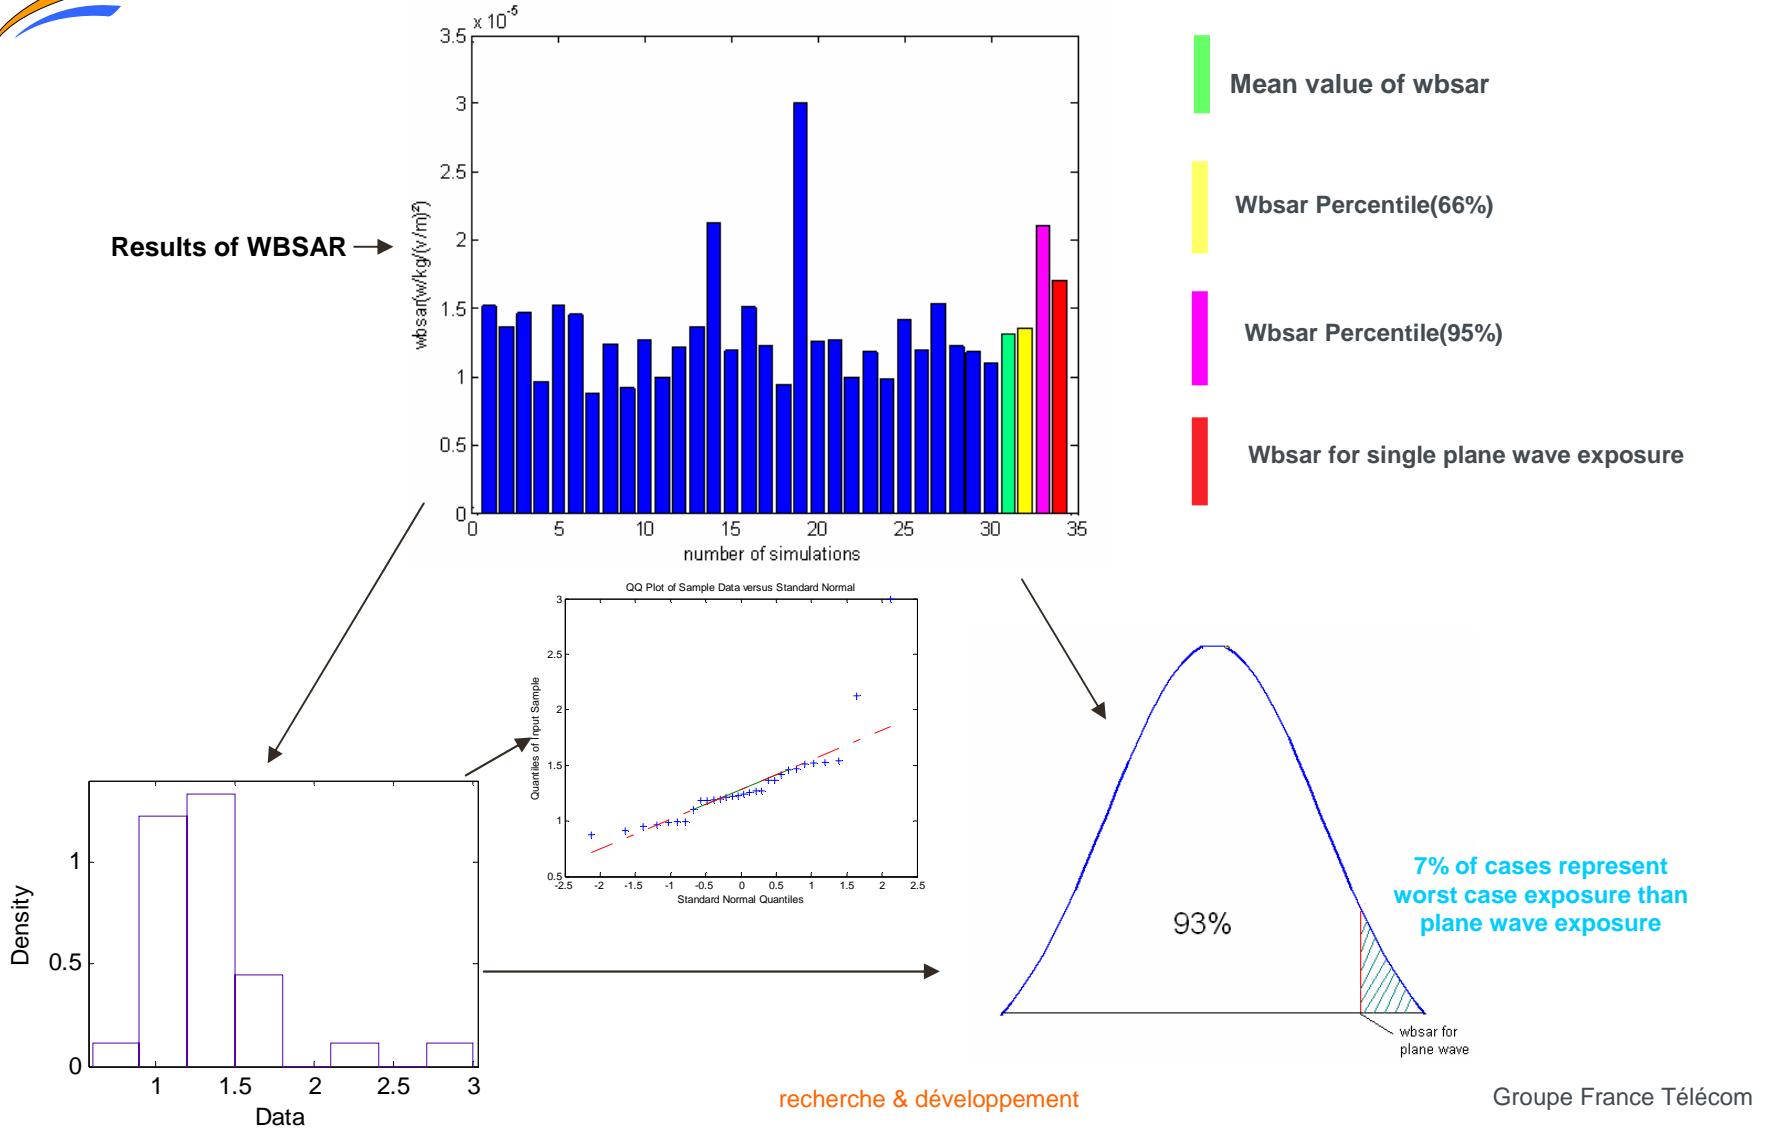




Specific case of exposure

Azimuthal angle 2D



Ez Distribution(Rayleigh)

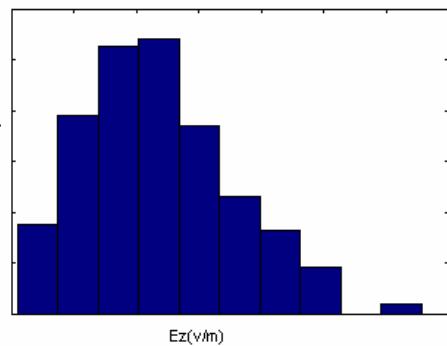


phantom exposure



wbsar



Max value of the wbsar

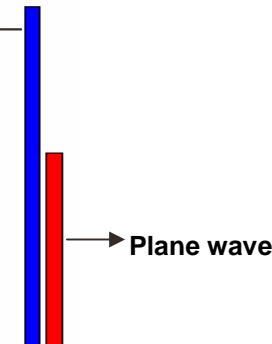


Azimuthal angle 2D



Ez Distribution(Rayleigh)

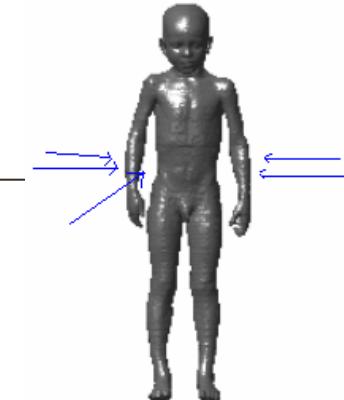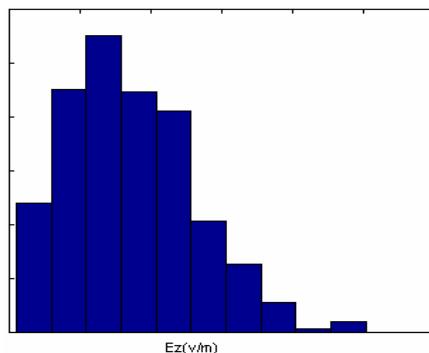


Min value of the wbsar

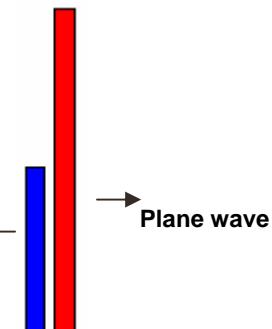

Two different configurations of azimuthal angles ,same distribution of E(z) field in the space but results of wbsar very different for each exposure case.





Analyze the wbsar results

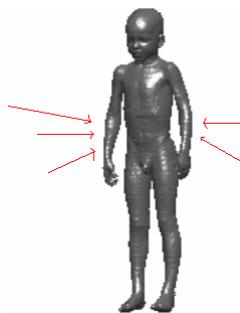


$(A_i, \phi_i)_{i=1..5}$

$A_i(v/m)$	ϕ_i
0.6	357°
0.23	207°
1.2	81°
0.7	340°
0.9	292°

One case of exposure

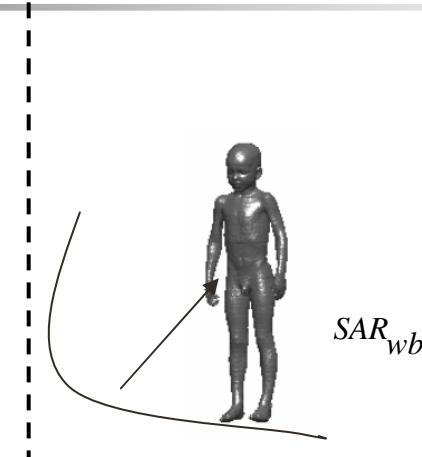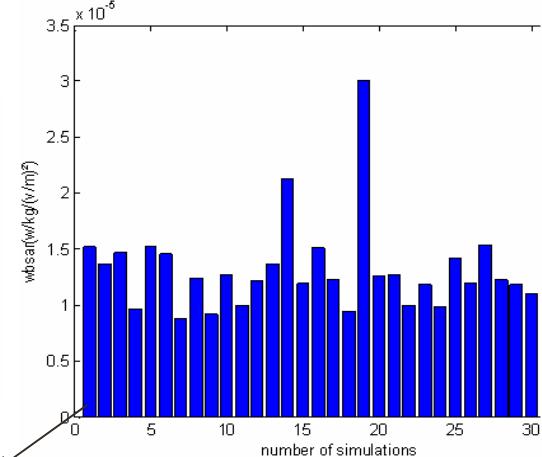


Cf emmanuelle Conil[2008]

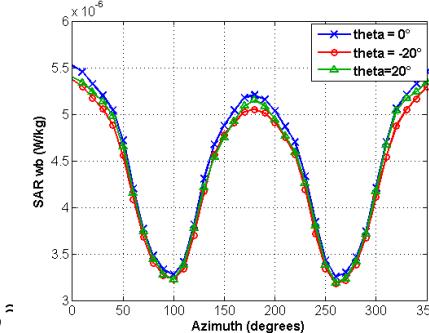

For three simulations we assessed a $\langle \alpha \rangle_{\text{mean}}$


$SAR_{wb}(A_i, \phi_i) \approx \langle \alpha \rangle_{\text{mean}} \cdot \text{surface_highlighted}(\phi_i)$

$$SAR_{wb} \left(\sum_{i=1}^5 (A_i, \phi_i) \right)_1 = \sum_{i=1}^5 SAR_{wb}(A_i, \phi_i)_1 + \varepsilon_1$$

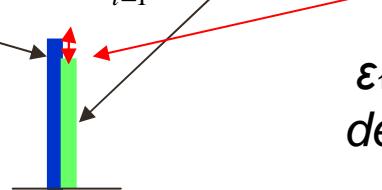

ε_1 represent an deviation of 15%

We perform for all cases of exposure

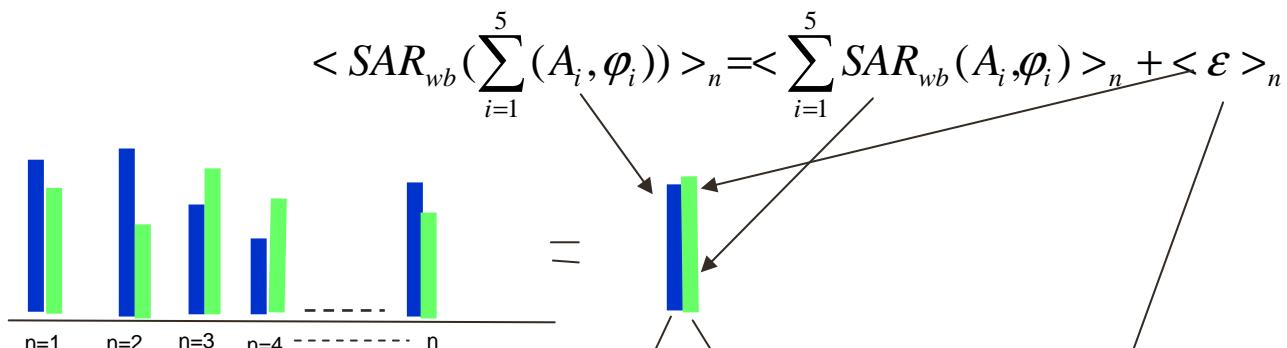


Results for all cases of exposure

$$\langle wbsar \rangle = 1.31 \text{ e-}05 \text{ w/kg(v/m)}^2$$


$$\langle wbsar \rangle = 1.40 \text{ e-}05 \text{ w/kg(v/m)}^2$$

Epsilon mean is 0.06

$$\langle SAR(\sum(A, \varphi)) \rangle$$

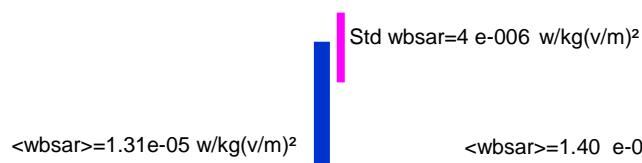


$$\langle \sum SAR(A, \varphi) \rangle$$

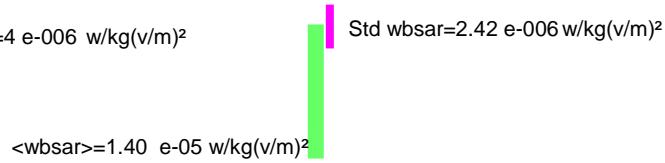



Ouv 10°face bonhomme

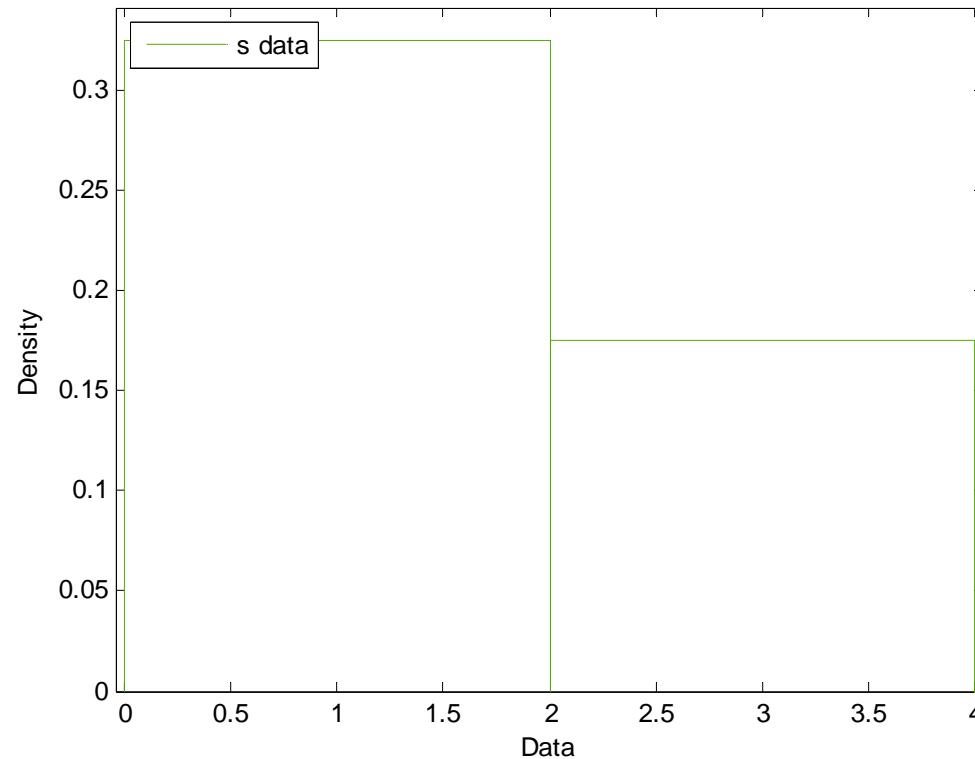



Conclusion & Perspectives

- Ponctually the impact of fading can be important on WBSAR but it's possible to assess the multiple exposure approximatively thanks to single plane waves exposure
- Perform other simulations to improve assessment of α
- Investigate other configurations of exposure for different parameters of incident field
- Perform with other phantoms



Pour une config d'expositions ondes multiples

$N(m_1, std_1)$ pour un fantôme

$N(m_2, std_2)$ pour un fantôme

.....

Trouver m et std en fonction de la morphologie (Aimad) pour une configuration d'exposition ondes multiples.